
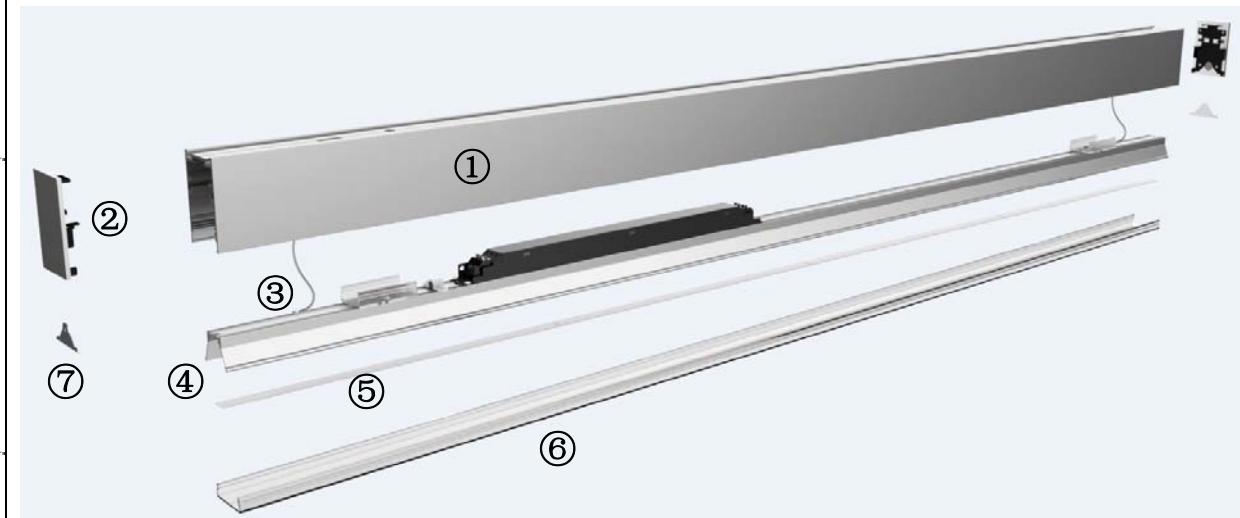
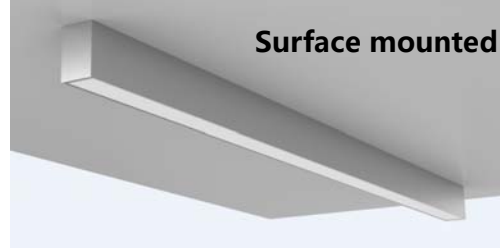
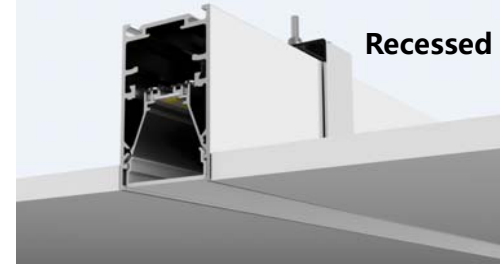




## Profile series


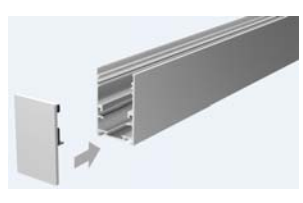
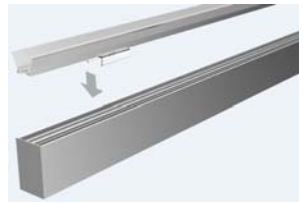
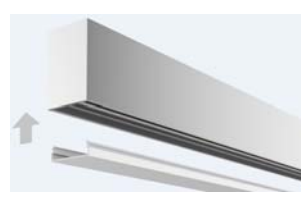








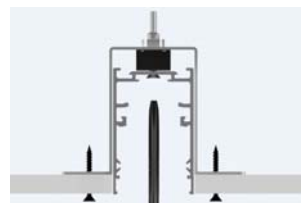

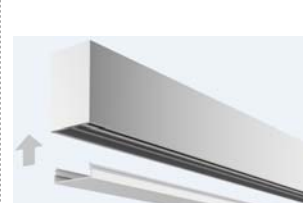


- HL-4266 (W42 x H66mm)
- HL-5570 (W55 x H70mm)
- HL-7380 (W73 x H80mm)
- HL-9086 (W90 x H86mm)

All profiles listed above are available in 1.2m or 2.5m length (cut to suit on site).

0-10V built-in dimmable LED drivers 25W, 65W and 100W also available.

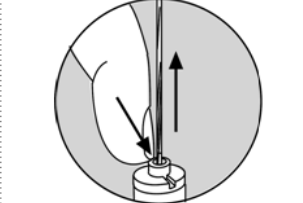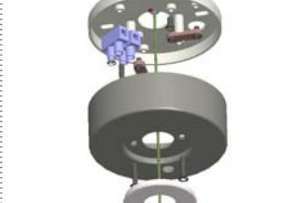

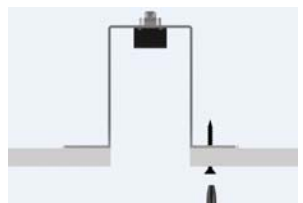- Parts Description:
- ① Main Profile
  - ② End cap
  - ③ Safety Cord
  - ④ LED Strip holder
  - ⑤ LED Strip
  - ⑥ Diffuser
  - ⑦ Diffuser lock

	Step1: Mount Suspended Wire on the Ceiling	Step2: Install the End Caps	Step3: Lock the Safety Cord and Carrier	Step4: Mount the Diffuser	Step5: Insert the diffuser lock	Step6: Fix the Wire on the Profile	Step7: Adjust the Height	Step8: Connect the Feeding Wire	Step9: Power On
<b>Pendant</b>									
<b>Recessed</b>									
<b>Surface mounted</b>	