



# Hippo-Series by Hi-Line

**Connectors for IP00/20/54/65 LED strips**




**Email: [support@hiline-lighting.co.uk](mailto:support@hiline-lighting.co.uk)**






"Hippo" connectors are designed for professional LED strip installations

## How to use

### 1. Connect to LED Strip

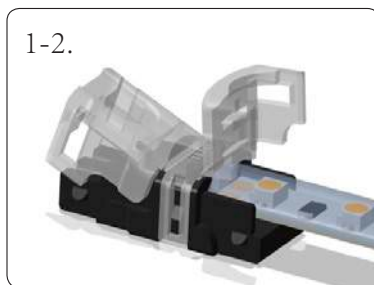

### 2. Attach Wire to Connector

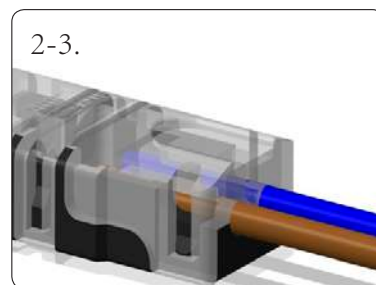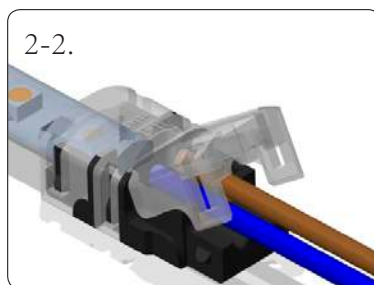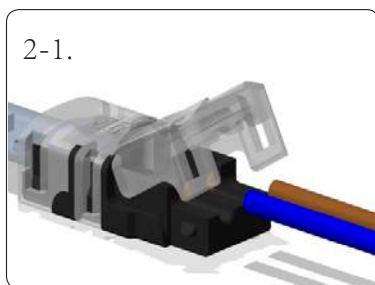

Take single color (strip to wire) as example, other color types are similar

## Application Effect



## IP65 rated versions

## For IP65/IP54 Strip

Item NO.	HL-SC-B8-IP65	HL-SC-A8-IP65
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	8 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP54 or IP65	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



Item NO.	HL-SC-B10-IP65	HL-SC-A10-IP65
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	10 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP54 or IP65	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	




Item NO.	HL-CCT-B10-IP65	HL-CCT-A10-IP65
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	3 pins	
Strip Light Width	10 mm	
Strip Light Color	Dual Color / CCT	
Strip Light IP Rating	IP54 or IP65	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



# Hippo-M Series

LED Strip Connector  
www.hiline-lighting.co.uk

Item NO.	HL-RGB-B10-IP65	HL-RGB-A10-IP65
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	4 pins	
Strip Light Width	10 mm	
Strip Light Color	RGB	
Strip Light IP Rating	IP54 or IP65	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	

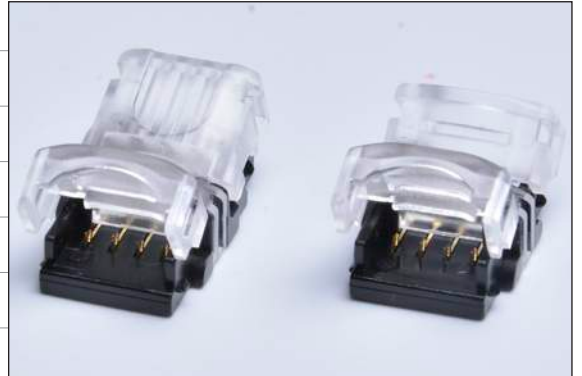

Item NO.	HL-RGBW-B12-IP65	HL-RGBW-A12-IP65
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	5 pins	
Strip Light Width	12 mm	
Strip Light Color	RGBW	
Strip Light IP Rating	IP54 or IP65	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



## IP00/20 rated versions

For IP20 Strip

Item NO.	HL-SC-B8-IP00	HL-SC-A8-IP00
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	8 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



Email: [support@hiline-lighting.co.uk](mailto:support@hiline-lighting.co.uk)

# Hippo-M Series

LED Strip Connector  
www.hiline-lighting.co.uk

Item NO.	HL-SC-B10-IP00	HL-SC-A10-IP00
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	2 pins	
Strip Light Width	10 mm	
Strip Light Color	Single Color	
Strip Light IP Rating	IP20	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



Item NO.	HL-CCT-B10-IP00	HL-CCT-A10-IP00
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	3 pins	
Strip Light Width	10 mm	
Strip Light Color	Dual Color / CCT	
Strip Light IP Rating	IP20	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



Item NO.	HL-RGB-B10-IP00	HL-RGB-A10-IP00
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	4 pins	
Strip Light Width	10 mm	
Strip Light Color	RGB	
Strip Light IP Rating	IP20	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	



# Hippo-M Series

**LED Strip Connector**  
www.hiline-lighting.co.uk

Item NO.	HL-RGBW-B12-IP00	HL-RGBW-A12-IP00
Type	strip to power	strip to strip
Voltage & Current	DC3~24V / Max.5A	
Pin Quantity	5 pins	
Strip Light Width	12 mm	
Strip Light Color	RGBW	
Strip Light IP Rating	IP20	
Workable Wire Gauge	22~18 AWG / 0.34~0.78 mm <sup>2</sup>	
Material	PC & Copper	

