

## IP65 LED Strip Light 500cm – 7.2W/m – powered by SMD5050

- Length 500 cm
- LED strips for common applications
- ideal for use in living areas
- good colour rendering
- good efficiency: up to 540 Lm/m
- long operating life L70 > 36,000 h at Tc < 80 °C
- with high-quality 3M double adhesive tape

Please observe the installation and safety instructions at [https://www.hiline-lighting.co.uk/gb/index.php?controller=attachment&id\\_attachment=114](https://www.hiline-lighting.co.uk/gb/index.php?controller=attachment&id_attachment=114) !

### PHOTOMETRIC DATA

	HL-LS5050-30RGB-IP65-24V
Typ. colour temperature	
Light colour	R,G,B,
Typ. luminous flux per meter	540 lm/m
Efficiency	
Energy efficiency class	A++
Typ. colour rendering index	
LED beam angle	120 °
Lifetime L70	>36000 h

### ELECTRICAL DATA

	HL-LS5050-30RGB-IP65-24V
Operating voltage	24V – DC
Typ. power per meter	7.2 W/m

### MECHANICAL DATA

	HL-LS5050-30RGB-IP65-24V
Length stripe	5000 mm
Width stripe	10 mm
Height stripe	5 mm
Number of LEDs per cut	5
Number of cuts	50
Length per cut	168 mm
Type of protection	IP 65

	HL-LS5050-30RGB-IP65-24V
Cut	One section 168mm 2700K


## FURTHER DATA

	HL-LS5050-30RGB-IP65-24V
Max. operable length <sup>1</sup>	10000 mm
Storage temperature	-30° C ~ +80° C
Max. temperature Tc <sup>2</sup>	80° C

<sup>1</sup>The value given applies to the application of rated voltage at the first module section. When using a supply line, the maximum operable length changes depending on the supply line length and its cross section. At "www.hiline-lighting.co.uk" you will find an overview for orientation and calculation for volt drop.

<sup>2</sup>Tc=Case temperature at Tc point, this should be measured in a thermally stable state

## TECHNICAL DRAWING

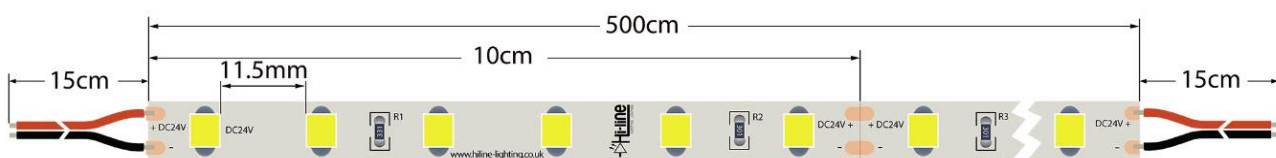

## Certificates and Standards CE & RoHS

LVD Directive 2014/35/EU  
EMC Directive 2004/108/EC  
RoHS Directive 2011/65/EU  
RTTE Directive 99/5/EC

The following harmonized standards were applied:  
EN60598-1:2008+A11:2009, EN60598-2-20:2010+AC:2010  
EN55015:2013, EN61547:2009, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010  
EN1122:2001, EPA3050B, EPA3052, EPA3540C, EPA3060A  
IEC62321: 2013

© 2018 Hi-Line Lighting Ltd. All rights reserved.

This document contains information relating to the Hi-Line Lighting portfolio and is intended for companies who may be interested in developing their product offering. Note that the information provided is subject to change. Hi-Line Lighting does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.